



SCC-OEM-U2 SLEEPING CHILD CHECK MONITOR (SCC) SCHEMATIC

Interior Light Version

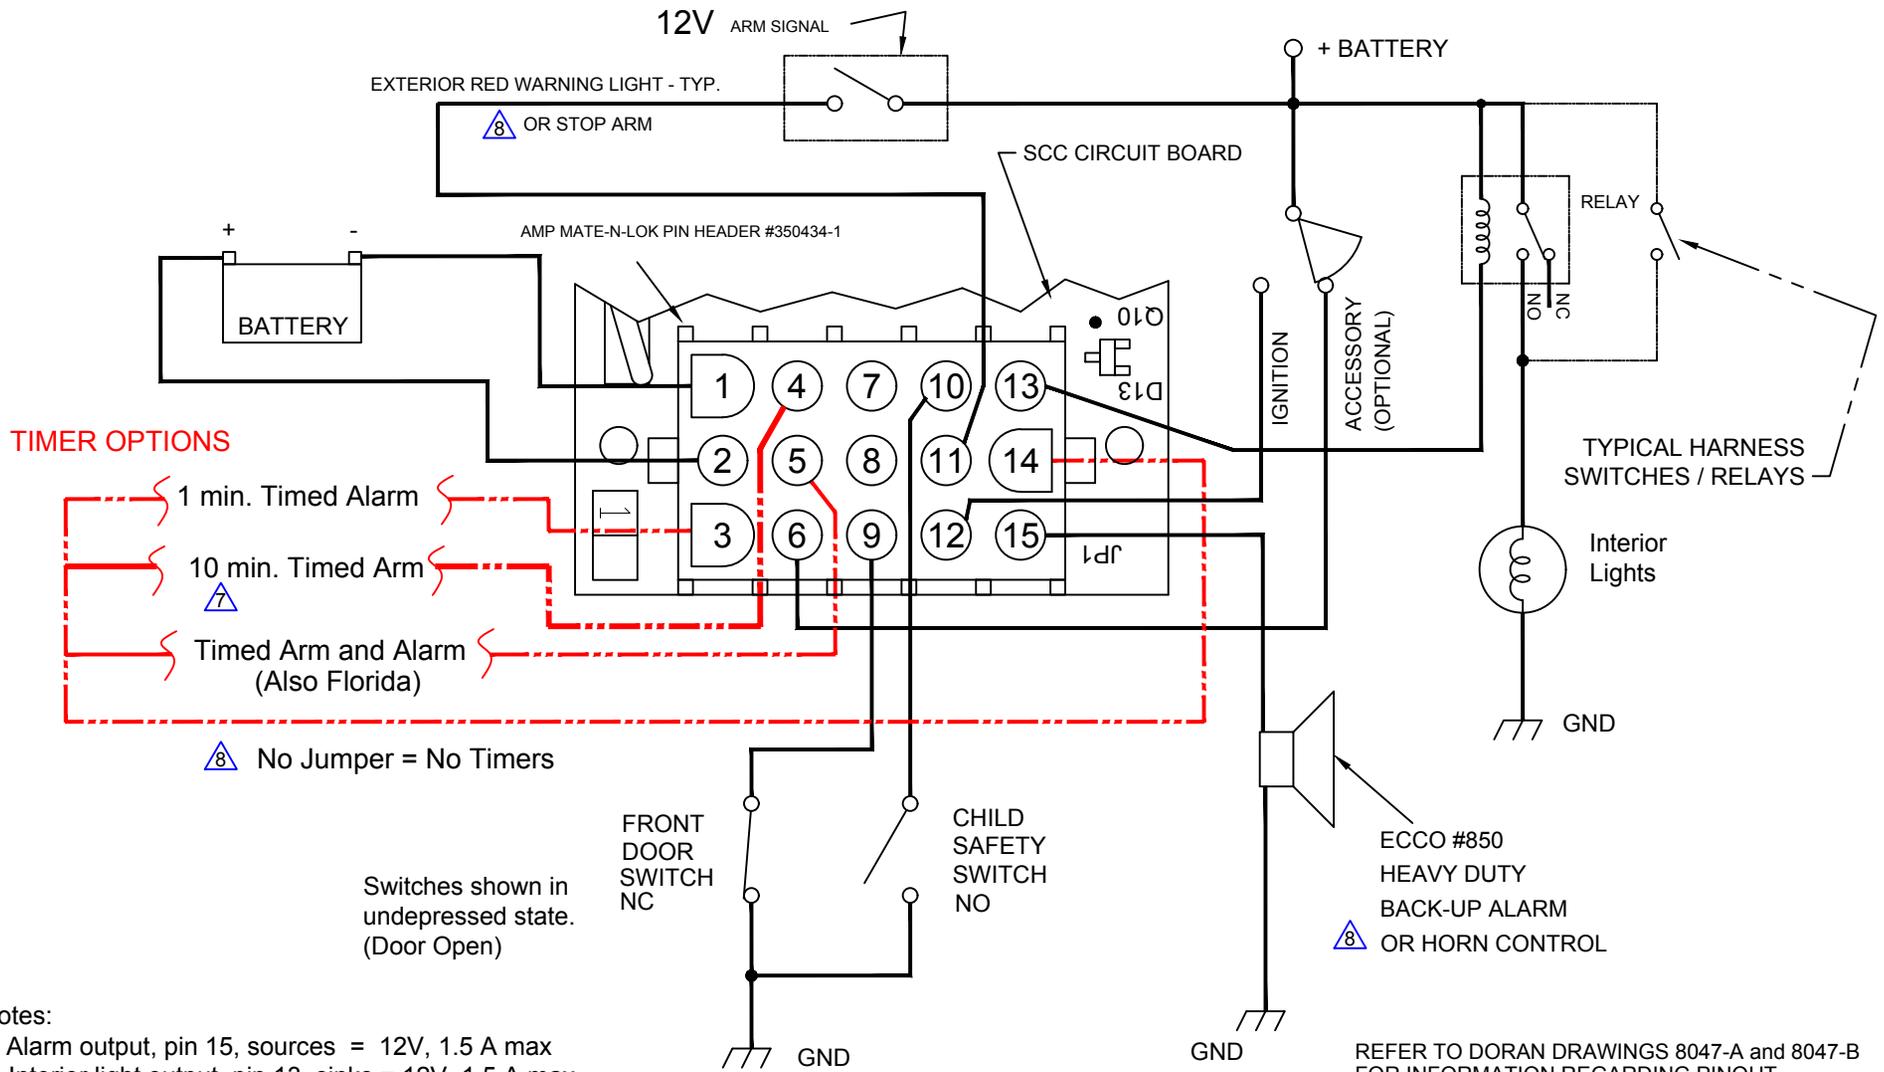

TIMER OPTIONS

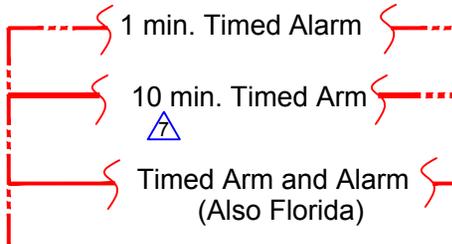

△ No Jumper = No Timers

Switches shown in undepressed state. (Door Open)

Notes:

1. Alarm output, pin 15, sources = 12V, 1.5 A max
2. Interior light output, pin 13, sinks = 12V, 1.5 A max
3. For timer options, connect a jumper wire in harness connector from PIN 14 to PIN 3, 4 OR 5.

THE DRAWING AND/OR TECHNICAL INFORMATION ON THIS SHEET IS THE PROPERTY OF DORAN MANUFACTURING OR OSBORNE COINAGE AND IS LOANED IN CONFIDENCE FOR ENGINEERING AND MUTUAL ASSISTANCE PURPOSES ONLY, AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING DISCLOSED HEREON WITHOUT THE EXPRESS PERMISSION OF DORAN MANUFACTURING WHICH MAY RECALL THIS SHEET AT ANY TIME.

REV.	DESCRIPTION	INITIALS
1	PART NAME SCC-OEM-U2, 8/16/2011	JPR
2	Revise PIN 14's N/O connection note, 5/22/12	JPR
3	Change pins 13 & 15 current to 1.5A; Accessory switch optional - 5/31/12	JPR
4	ADD NOTE #3, - 6/7/12	JPR
5	Spec 1 and 10 Min timers - 6/8/12	JPR
6	Change timer on PIN 4 to 5 min - 11/19/13	JPR
7	Add 12V spec, change timer on PIN 4 to 10 min; modify part name - 4/16/15	JPR
8	Add Stop Arm option to pin 11, add Horn option to Pin 15, Pin 14 note for no jumper = no timer. 5/11/2016	JPR

REFERENCE BLUE BIRD PART #10026427

DORAN MANUFACTURING CO.
CINCINNATI, OHIO 45225

PART NAME
SCC-OEM-U2 TYPICAL WIRING DIAGRAM

TOLERANCES
DECIMALS .XXX +OR- .005, .XX +OR- .015
FRACTIONS +OR- 1/32, ANGLES +OR- 1/2 DEGREE

CUSTOMER
SCALE
NO SCALE

DRAWN JPR DATE 8/4/2011 DRAWING NO. 6963-I REV. 8
APPR DATE

REFER TO DORAN DRAWINGS 8047-A and 8047-B FOR INFORMATION REGARDING PINOUT AND OPERATING INSTRUCTIONS.